









*Machines already on delivery in the new colours & trims shown in the picture above

Single head, rising blade cutting-off machine, with left loading side, for cutting at angular settings from 20° to the left to 20° to the right as intermediate angles.

TECHNICAL SHEET

10/05/2023





Vices

Thanks to the technical solutions adopted, the horizontal and vertical vices ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the vices. Such characteristic allows the use of this machine in window/door manufacture and for cutting industrial profiles.



Blade and roller conveyor

The cutting-off machine can be equipped with 450, 500 or 550 mm cemented carbide blades, which, mounted on a pneumatic feed system, make it ideal for cutting profiles with multiple sections.



Cutting zone

To enable maximum utilization of the cutting capacity, the cutting zone features a strong structure designed to ensure maximum rigidity. This is with regard to both the horizontal plane and the vertical square.



Control

The control console allows userfriendly and intuitive machine operation. Machine management control is complemented by the vice pressure adjustment system (optional) and the ability to adjust the blade output speed.





TKE 355-350-345 PA / SINGLE HEAD CUTTING-OFF MACHINES

BLADE

Made of Widia (based on model) (mm)

 $\emptyset = 450 \; ; \; \emptyset = 500 \; ; \\ \emptyset = 550 \; ; \; \emptyset = 550 \; ; \;$

BLADE FEED

Hydro-pneumatic

CUTTING AREA PROTECTION

Full guard manually operated

Automatic opening of the blade protection

0

LUBRICATION SYSTEM

Water spray-mist with oil emulsion or minimal diffusion oil spray-mist (depending on version)

WORKPIECE LOCKING

Pair of pneumatic vertical and horizontal vices

MOTOR

Three-phase brakemotor


Brake intervention time (s)

10

4

Power (kW)

CUTTING DIAGRAM

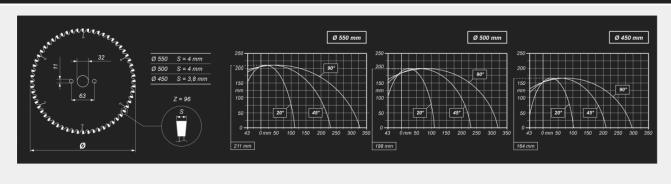

Included ● Available ○



Emmegi S.p.A. Via delle Industrie, 2 20044 - Arese (MI) Tel 39 02356961 P.IVA 01978870366 info@tekna.it www.tekna.it The right to make technical alterations is reserved.